


☐ DOMESTIC

☐ NON-DOMESTIC

SUBMITTAL: C110 MECHANICAL JOINT PRODUCT

(Current revisions for the noted Standards apply)

SIZES:	2" through 48"
STANDARDS:	ANSI/AWWA C110/A21.10, NFPA 13/24, 3" - 12" UL listed and approved (File - Tyler Union)
Material:	Cast of ASTM A536 qualified ductile iron. Date code is cast on and required for traceability.
PRESSURE RATING:	*Flanged fittings rated at 250 psi. Mechanical joints 2" – 24" rated at 350 psi and 30" – 48" at 250 psi. *Note: With rubber annular ring flange gasket, 2" – 24" Flanged fittings can be rated at 350 psi.
DEFLECTION:	Max joint deflection 2"– 12", 5° and 14"– 48", 3°. Reduces by 50% at nominal pipe & fitting diameters
NSF-61 & NSF-372:	Meets all requirements including Annex G, Tyler Union's Underwriters Laboratory listing MH16439.
COATING:	Standard asphaltic per ANSI/AWWA C104/A21.4 and ANSI/AWWA C110/A21.10. Fusion bonded epoxy coating per ANSI/AWWA C116/A21.16 is available. Additional coating available upon request.
CEMENT LINING:	Per ANSI/AWWA C104/A21.4, with double cement lining.
RARE FITTINGS:	Available upon request.
FASTENERS:	High strength low alloy weathering steel per ANSI/AWWA C111/A21.11 and ASTM A242
INSTALLATION:	Install per AWWA C600/C651 using pipe conforming to ANSI/AWWA C151/A21.51 or AWWA C900/905.

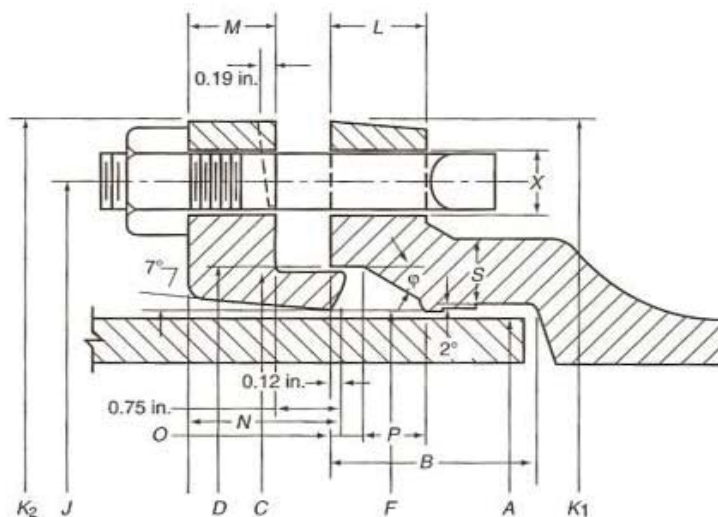

NOMINAL JOINT DIMENSIONS IN INCHES																	
Size	A Dia.	B Hub	C Dia.	D Dia.	F Dia.	Ø	X	J Dia.	K ¹ Dia.	K ² Dia.	L	M	N	O	P	S	Qty.
Inches	DI Pipe	Depth	GLAND					GLAND		GLAND		GLAND	GLAND				BOLTS
2	2.51	2.50	3.39	3.50	2.61	28°	3/4	4.75	6.25	6.25	0.73	0.62	1.12	0.31	0.63	0.44	2
3	3.96	2.50	4.84	4.94	4.06	28°	3/4	6.19	7.62	7.69	0.94	0.62	1.37	0.31	0.63	0.52	4
4	4.80	2.50	5.92	6.02	4.90	28°	7/8	7.50	9.06	9.12	1.00	0.75	1.50	0.31	0.75	0.65	4
6	6.90	2.50	8.02	8.12	7.00	28°	7/8	9.50	11.06	11.12	1.06	0.88	1.63	0.31	0.75	0.70	6
8	9.05	2.50	10.17	10.27	9.15	28°	7/8	11.75	13.37	13.37	1.12	1.00	1.75	0.31	0.75	0.75	6
10	11.10	2.50	12.22	12.34	11.20	28°	7/8	14.00	15.69	15.62	1.19	1.00	1.75	0.31	0.75	0.80	8
12	13.20	2.50	14.32	14.44	13.30	28°	7/8	16.25	17.94	17.88	1.25	1.00	1.75	0.31	0.75	0.85	8
14	15.30	3.50	16.40	16.54	15.44	28°	7/8	18.75	20.31	20.25	1.31	1.25	2.00	0.31	0.75	0.89	10
16	17.40	3.50	18.50	18.64	17.54	28°	7/8	21.00	22.56	22.50	1.38	1.31	2.06	0.31	0.75	0.97	12
18	19.50	3.50	20.60	20.74	19.64	28°	7/8	23.25	24.83	24.75	1.44	1.38	2.13	0.31	0.75	1.05	12
20	21.60	3.50	22.70	22.84	21.74	28°	7/8	25.50	27.08	27.00	1.56	1.44	2.19	0.31	0.75	1.12	14
24	25.80	3.50	26.90	27.04	25.94	28°	7/8	30.00	31.58	31.50	2.00	1.56	2.31	0.31	0.75	1.22	16
30	32.00	4.00	33.29	33.46	32.17	20°	1-1/8	36.88	39.12	39.12	2.00	2.00	2.75	0.38	1.00	1.50	20
36	38.30	4.00	39.59	39.76	38.47	20°	1-1/8	43.75	46.00	46.80	2.00	2.00	2.75	0.38	1.00	1.80	24
42	44.50	4.00	45.79	45.96	44.67	20°	1-3/8	50.62	53.12	53.12	2.00	2.00	2.75	0.38	1.00	1.95	28
48	50.80	4.00	52.09	52.26	50.97	20°	1-3/8	57.50	60.00	60.00	2.00	2.00	2.75	0.38	1.00	2.20	32

Tyler: 11910 CR 492 • Tyler, TX 75706 • (800) 527-8478
 Anniston: 1501 W 17th St. • Anniston, AL 36201 • (800) 226-7601
 New Lenox: 2200 West Haven • New Lenox, IL 60451
 Corona: 1001 El Camino Ave. • Corona, CA 92879 • (866) 527-8471

Dallas: 1201, Avenue 5 • Grand Prairie, TX 75050
 Anniston: 1800 Greenbrier Rd • Anniston, AL 36201 • (800) 226-7601
 Elmer: 701 Kenyon Ave • Elmer, NJ 03318
 Portland: 6204 N. Marine Dr. • Portland, OR 97203